


**NOTE:**

- Torque bolt onto glass to 12Nm [9lb ft]
- If laminated glass, use silicone washers & finger tighten back plate plus 1/4 turn.

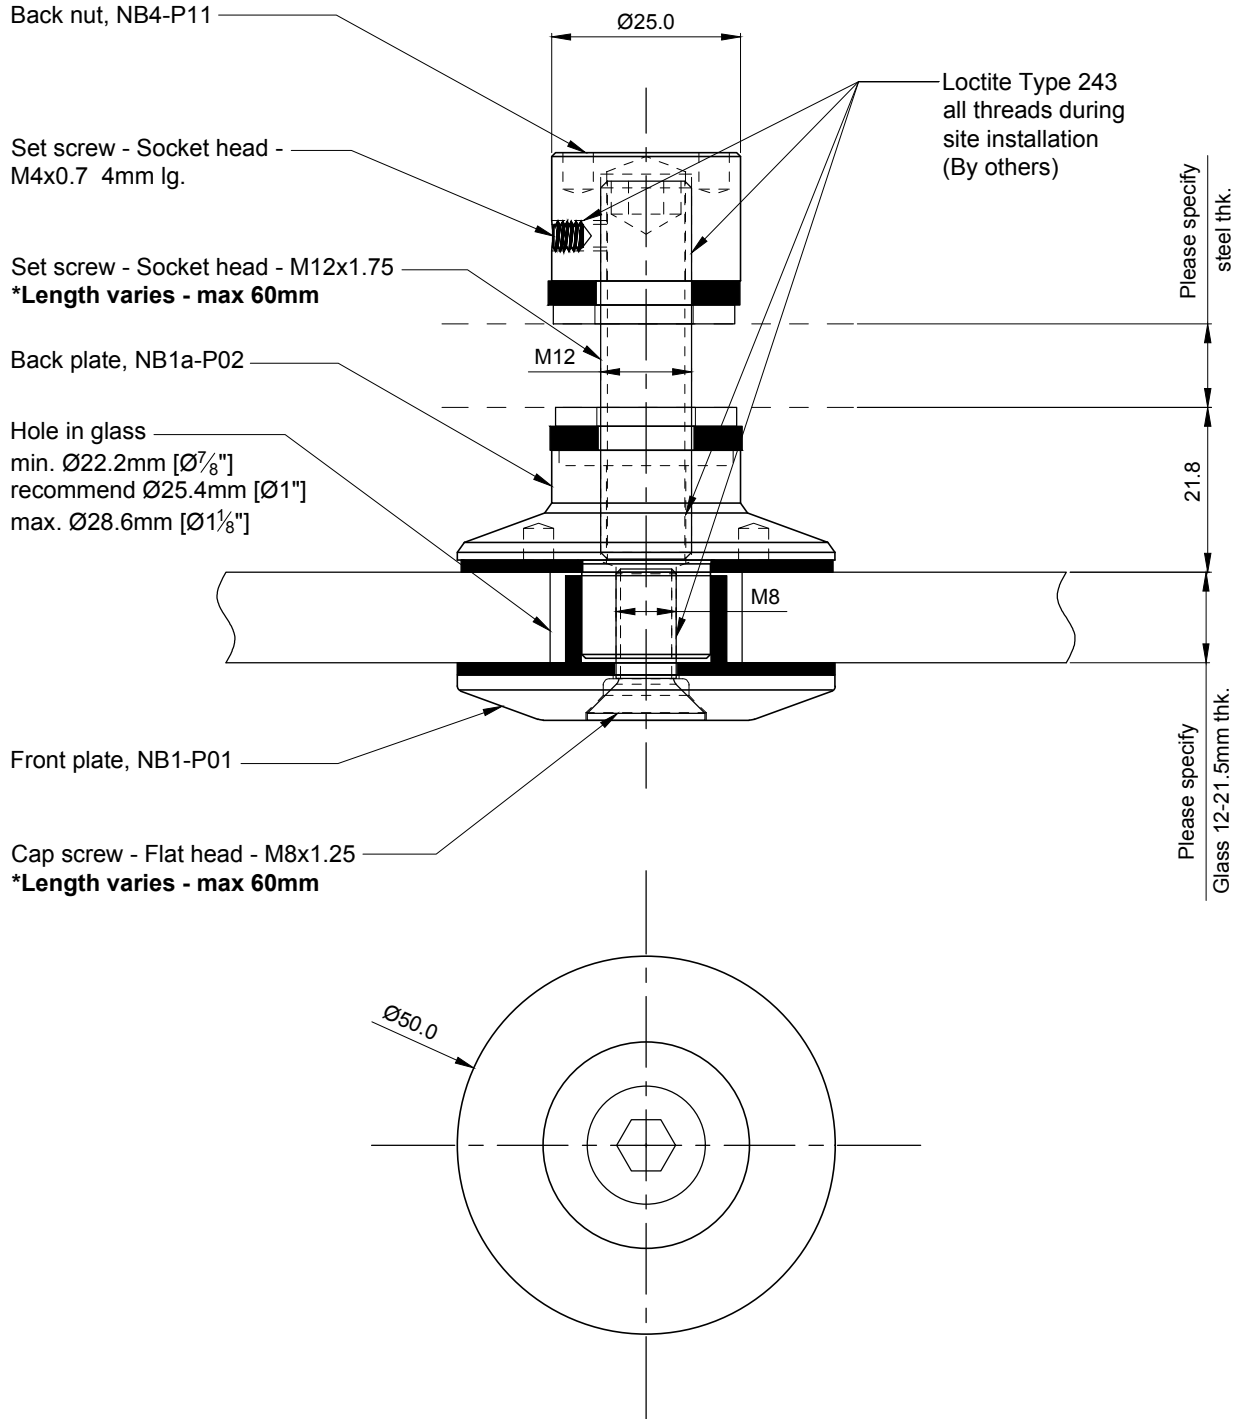

REV 3 - NB1a-P02 part updated - 20190417 MT  
 REV 2 - Loctite type 243 notes added - 20160422  
 REV 1 - Stud and back nut size changed and emboss added - JUN 17-2013

Quantity: Sets  
 Material: Grade 316 Stainless steel  
 Finish: Machined

Hole in glass see above  
 Dimensions millimeter unless otherwise shown  
 4mm hole can be tighten w/ adjustable pin spanner  
 (Ref. SPA-01)  
 Subject to change

Drawn	Drawn date
RS	JUN 16-13
Checked	Checked date
Scale	Rev.
1:1	3
DWG No	
NB502T	



**stella**  
 [t] (604) 231 5892  
 [f] (604) 231 5893  
 [e] info@stellaglasshardware.com

**ASSEMBLY DRAWING  
 NON-ARTICULATING BOLT NB502T**