


Standard penetration length	
Glass thickness	Penetration
12mm	113mm
19mm	106mm
21.5mm (10/1.52/10)	103mm
For non-standard penetration, contact Stella!	


Hole in glass  
min.  $\text{Ø}22.2\text{mm}$  [ $\text{Ø}\frac{7}{8}$ "]  
recommend  $\text{Ø}25.4\text{mm}$  [ $\text{Ø}1$ "]  
max.  $\text{Ø}28.6\text{mm}$  [ $\text{Ø}1\frac{1}{8}$ "]

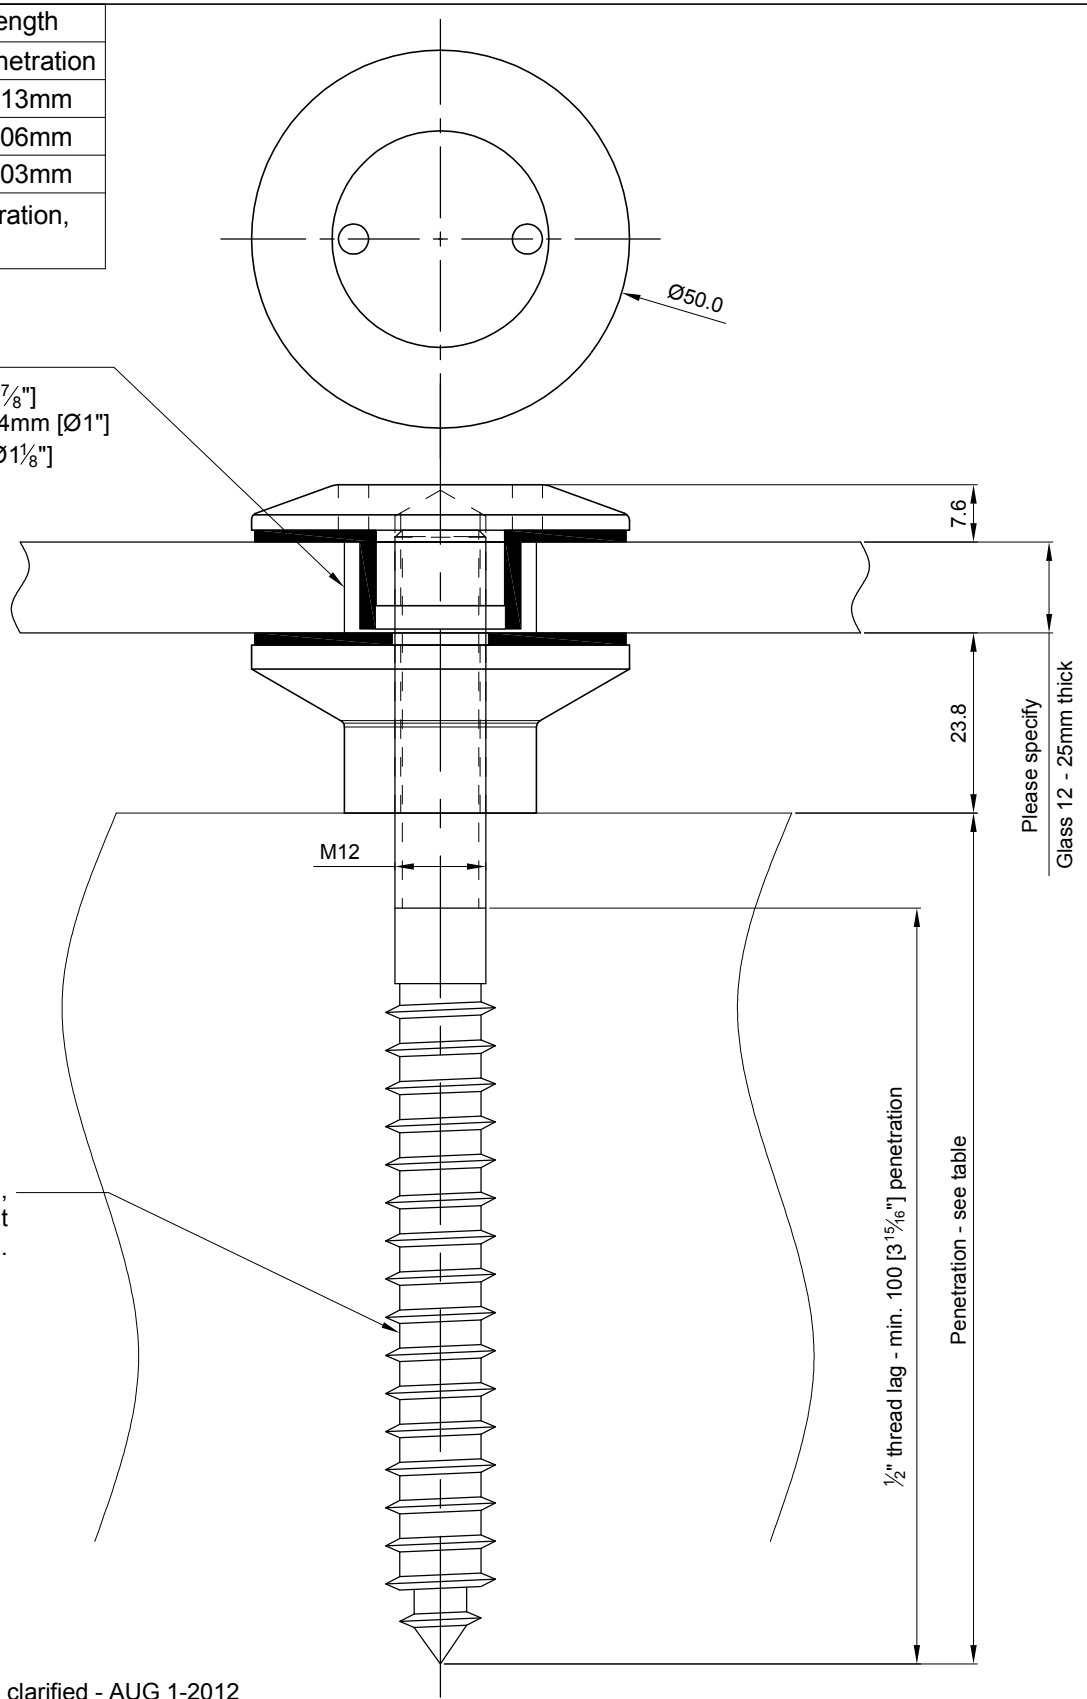


NB4-P09.1,  
M12 Hanger bolt  
x 150mm [6"] lg.

REV 1 - Lag bolt penetration clarified - AUG 1-2012

Quantity:  
Material: Grade 304/316 Stainless steel  
Finish: Machined

Hole in glass see above  
Dimensions millimeter unless otherwise shown  
Loctite all threads during final assembly  
4mm hole can be tighten w/ adjustable pin spanner  
(Ref. SPA-01)   
Subject to change

Drawn	Drawn date
RL	JUL 14-08
Checked	Checked date
Scale	Rev.
1:1	1
DWG No	
ST505T-W	



**stella**

[t] (604) 231 5892  
[f] (604) 231 5893  
[e] info@stellaglasshardware.com

ASSEMBLY DRAWING  
NON-ARTICULATING BOLT NB4 (P12) TIMBER MOUNTING  
FORMERLY NB4-A09