


Standard penetration length	
Glass thickness	Penetration
12mm	125mm
19mm	117mm
21.5mm (10/1.52/10)	115mm
For non-standard penetration, contact Stella!	

Hole in glass
min. Ø22.2mm [Ø7/8"]
recommend Ø25.4mm [Ø1"]
max. Ø28.6mm [Ø1 1/8"]

Loctite Type 243
all threads during
site installation
(By others)

NB4-P09.1,
M12 Hanger bolt x 150mm [6"] lg.

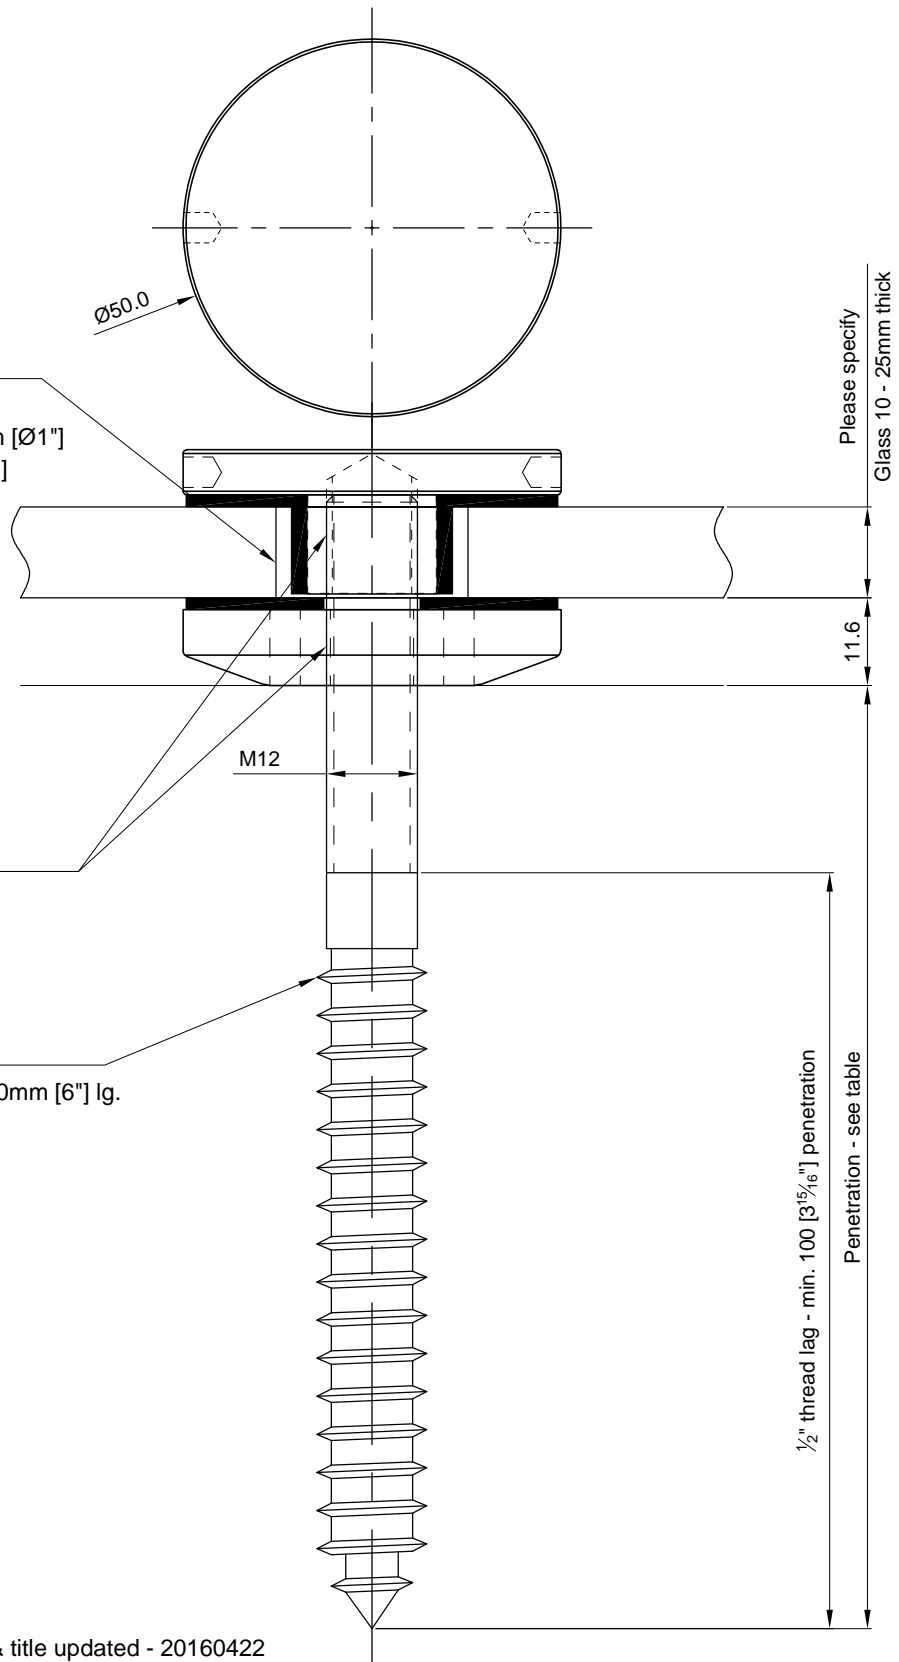

REV 2 - Loctite type 243 notes added & title updated - 20160422
REV 1 - Lag bolt penetration clarified - AUG 1-2012

Quantity:	Sets
Material:	Grade 316 Stainless steel
Finish:	Machined

Hole in glass above
Dimensions millimeter unless otherwise shown
4mm hole can be tighten w/ pin "C" spanner
(Ref. SPA-02)
Subject to change

Drawn	Drawn date
JH	OCT 26-09
Checked	Checked date
RL	OCT 26-09
Scale	Rev.
1:1	2
DWG No	
ST504F-W	

[i] (604) 231 5892
[f] (604) 231 5893
[e] info@stellaglasshardware.com

ASSEMBLY DRAWING
STANDOFF ST504F-W W/ FLAT FRONT PLATE &
M12 HANGER BOLT MOUNTED INTO WOOD - FORMERLY NB4-A12a